

The Office

Corporate Address : 619/D, Karkadi Road, Vishwash
Nagar Shahadara Delhi - 110032


Register Address : B 69 Raj City, Loni Ghaziabad - 201102

Phone : +91 9315061141, +91 9821961054

Email : ksengineering980@gmail.com

Website : www.ksengg.in

Wire drawing spools



Wire Stranding Machine



Electronic Furnace




Features :

1. Durability
2. Easy maintenance
3. Optimum performance

Die Threading Pointing Machine

Features:

1. Sturdy construction
2. High operational fluency
3. User friendly design
4. Low energy consumption



Wire Spooler




Fine wire drawing - 1.62 mm to 190 mm

Features:

1. Trouble-free performance
2. High operational fluency
3. Sturdy construction
4. Longer service life



Off Line Annealing Machine



Features:

- High production capacity
- Quality approved
- Fine finish

Tendum Type RBD



Dry Block Wire Drawing Machine



Features :

- Quality approved
1. Long term functionality
 2. Optimal design
 3. Affordable price

Intermediate Wire Drawing Machine

Wet Wire Drawing Machine



Features:


1. Quality approved
2. Impeccable performance
3. Robust design
4. Longer service life



Super Enameling Machine



Rod Break Down Machine

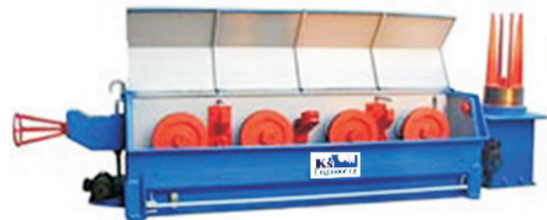



S.W.G. No.	Dia Meter Inch.	Dia Meter mm	S.W.G. No.	Dia Meter Inch.	Dia Meter mm	S.W.G. No.	Dia Meter Inch.	Dia Meter mm	S.W.G. No.	Dia Meter Inch.	Dia Meter mm
7/0	0.500	12.7000	11	0.116	2.9464	24	0.0220	0.559	37	0.0068	0.173
7/0.50	0.482	12.2428	11.25	0.113	2.8702	24.25	0.0215	0.546	37.25	0.0066	0.168
6/0	0.464	11.7856	11.50	0.110	2.7940	24.50	0.0210	0.533	37.50	0.0064	0.163
6/0.50	0.448	11.3792	11.75	0.107	2.7178	24.75	0.0205	0.520	37.75	0.0062	0.157
5/0	0.432	10.9728	12	0.104	2.6416	25	0.0200	0.508	38	0.0060	0.152
5/0.50	0.416	10.5664	12.25	0.101	2.5654	25.25	0.0195	0.493	38.25	0.0068	0.147
4/0	0.400	10.1600	12.50	0.098	2.4892	25.50	0.0190	0.482	38.50	0.0056	0.142
4/0.50	0.386	9.8044	12.75	0.095	2.4130	25.75	0.0185	0.469	38.75	0.0054	0.137
3/0	0.372	9.4488	13	0.092	2.3368	26	0.0180	0.458	39	0.0052	0.132
3/0.50	0.360	9.1440	13.25	0.089	2.2606	26.25	0.0176	0.447	39.25	0.0051	0.129
2/0	0.348	8.8392	13.50	0.086	2.1844	26.50	0.0172	0.437	39.50	0.0050	0.126
2/0.50	0.336	8.5344	13.75	0.083	2.1002	26.75	0.0168	0.427	39.75	0.0049	0.124
1/0	0.324	8.2296	14	0.080	2.0320	27	0.0164	0.417	40	0.0049	0.122
1/0.50	0.312	7.9248	14.25	0.078	1.9812	27.25	0.0160	0.407	40.25	0.0047	0.119
1	0.300	7.6200	14.50	0.076	1.9304	27.50	0.0156	0.397	40.50	0.0046	0.117
1.25	0.294	7.4676	14.75	0.074	1.8796	27.75	0.0152	0.386	40.75	0.0045	0.114
1.50	0.288	7.3152	15	0.072	1.8286	28	0.0148	0.376	41	0.0044	0.112
1.75	0.282	7.1628	15.25	0.070	1.7780	28.25	0.0145	0.368	41.25	0.0043	0.109
2	0.276	7.0104	15.50	0.068	1.7272	28.50	0.0142	0.360	41.50	0.0042	0.107
2.25	0.270	6.8580	15.75	0.066	1.6764	28.75	0.0139	0.352	41.75	0.0041	0.104
2.50	0.264	6.7056	16	0.064	1.6256	29	0.0136	0.345	42	0.0040	0.102
2.75	0.258	6.5532	16.25	0.062	1.5748	29.25	0.0133	0.337	42.25	0.0039	0.099
3	0.252	6.4008	16.50	0.060	1.5240	29.50	0.0130	0.329	42.50	0.0038	0.097
3.25	0.247	6.2738	16.75	0.058	1.4732	29.75	0.0127	0.322	42.75	0.0037	0.094
3.50	0.242	6.1468	17	0.056	1.4224	30	0.0124	0.315	43	0.0036	0.091
3.75	0.234	6.0198	17.25	0.054	1.3716	30.25	0.0122	0.310	43.25	0.0035	0.089
4	0.232	5.8928	17.50	0.052	1.3208	30.50	0.0120	0.305	43.50	0.0034	0.086
4.25	0.227	5.7658	17.75	0.050	1.2700	30.75	0.0118	0.300	43.75	0.0033	0.084
4.50	0.222	5.6388	18	0.048	1.219	31	0.0116	0.295	44	0.0032	0.081
4.75	0.217	5.5118	18.25	0.046	1.167	31.25	0.0114	0.290	44.25	0.0031	0.079
5	0.212	5.3848	18.50	0.044	1.117	31.50	0.0112	0.285	44.50	0.0031	0.076
5.25	0.207	5.2578	18.75	0.042	1.066	31.75	0.0110	0.279	44.75	0.0029	0.074
5.50	0.202	5.1308	19	0.040	1.016	32	0.0108	0.274	45	0.0028	0.071
5.75	0.197	5.0038	19.25	0.039	0.991	32.25	0.0106	0.269	45.25	0.0027	0.069
6	0.192	4.8768	19.50	0.038	0.965	32.50	0.0104	0.264	45.50	0.0026	0.065
6.25	0.188	4.7752	19.75	0.037	0.939	32.75	0.0102	0.259	45.75	0.0025	0.063
6.50	0.184	4.6736	20	0.036	0.914	33	0.0100	0.254	46	0.0024	0.061
6.75	0.180	4.5720	20.25	0.035	0.888	33.25	0.0098	0.249	46.25	0.0023	0.059
7	0.176	4.4704	20.50	0.034	0.864	33.50	0.0096	0.244	46.50	0.0022	0.056
7.25	0.172	4.3688	20.75	0.033	0.836	33.75	0.0094	0.239	46.75	0.0021	0.054
7.50	0.168	4.2682	21	0.032	0.813	34	0.0092	0.234	47	0.0020	0.051
7.75	0.164	4.1656	21.25	0.031	0.788	34.25	0.0090	0.229	47.25	0.0019	0.049
8	0.160	4.0640	21.50	0.030	0.762	34.50	0.0088	0.224	47.50	0.0018	0.046
8.25	0.156	3.9624	21.75	0.029	0.737	34.75	0.0086	0.218	47.75	0.0017	0.044
8.50	0.162	3.8608	22	0.028	0.711	35	0.0084	0.213	48	0.0016	0.041
8.75	0.148	3.7592	22.25	0.027	0.686	35.25	0.0082	0.208	48.25	0.0015	0.038
9	0.144	3.6376	22.50	0.026	0.660	35.50	0.0080	0.203	48.50	0.0014	0.035
9.25	0.140	3.5560	22.75	0.025	0.636	35.75	0.0078	0.198	48.75	0.0013	0.032
9.50	0.136	3.4544	23	0.0240	0.610	36	0.0076	0.193	49	0.0012	0.030
9.75	0.132	3.3528	23.25	0.0235	0.597	36.25	0.0074	0.188	49.25	0.0011	0.028
10	0.128	3.2512	23.50	0.0230	0.584	36.50	0.0072	0.182	49.50	0.0011	0.027
10.25	0.125	3.1750	23.75	0.0225	0.571	36.75	0.0070	0.178	49.75	0.0010	0.026
10.50	0.122	3.0938									
10.75	0.119	3.0226									
K S ENGINEERING									50	0.0010	0.025